




STARLIGHT HEAVY DUTY SERIES

'4ft' 110-240Volt A.C. Emergency Light Unit

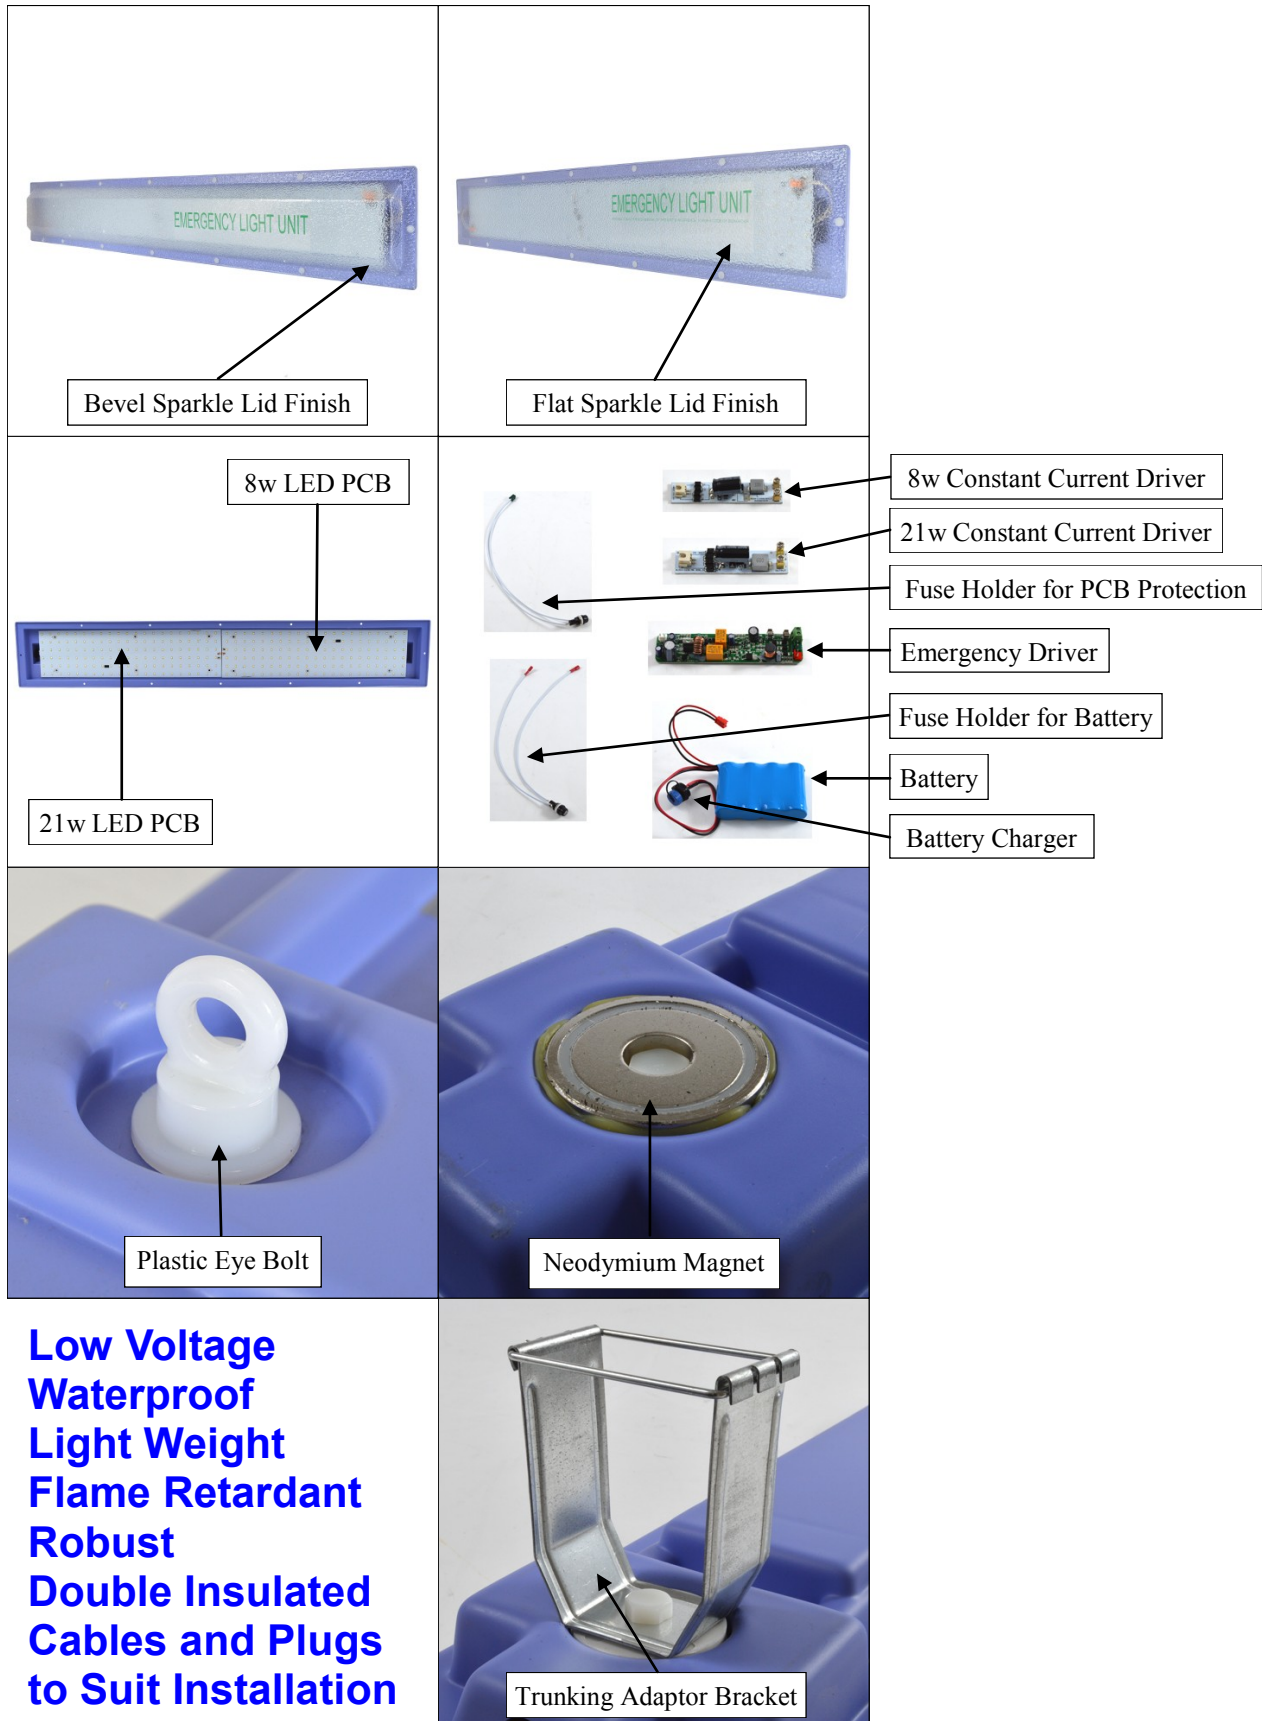

- Low Voltage
- Waterproof
- Light Weight
- Flame Retardant
- Robust
- Double Insulated
- Cables and Plugs to Suit Installation

Technical Information with Bevel Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w & 21w	
LED PCB	1 x 126 x 0.05w & 1 x 246 x 0.05w	
Constant Current Driver	40mA	
Lumens Per Watt	115	
Weight	1.5kg	
Size	1140mm x 190mm x 75mm	
Input Voltage	90-240volts AC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts AC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Bevel Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/4FT/B/EM/PEB/8/21/110/240
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/4FT/B/EM/NM/8/21/110/240
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/4FT/B/EM/TAB/8/21/110/240

Technical Information with Flat Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w & 21w	
LED PCB	1 x 126 x 0.05w & 1 x 246 x 0.05w	
Constant Current Driver	40mA	
Lumens Per Watt	115	
Weight	1.5kg	
Size	1140mm x 190mm x 50mm	
Input Voltage	90-240volts AC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts AC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Flat Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/4FT/F/EM/PEB/8/21/110/240
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/4FT/F/EM/NM/8/21/110/240
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/4FT/F/EM/TAB/8/21/110/240

IVIC LTD

4 Winchester Drive
 South West Industrial Estate
 Peterlee
 Co. Durham
 SR8 2RJ
www.ivicltd.com

