




STARLIGHT HEAVY DUTY SERIES

'2ft' 25Watt 110-240Volt A.C. Light Unit

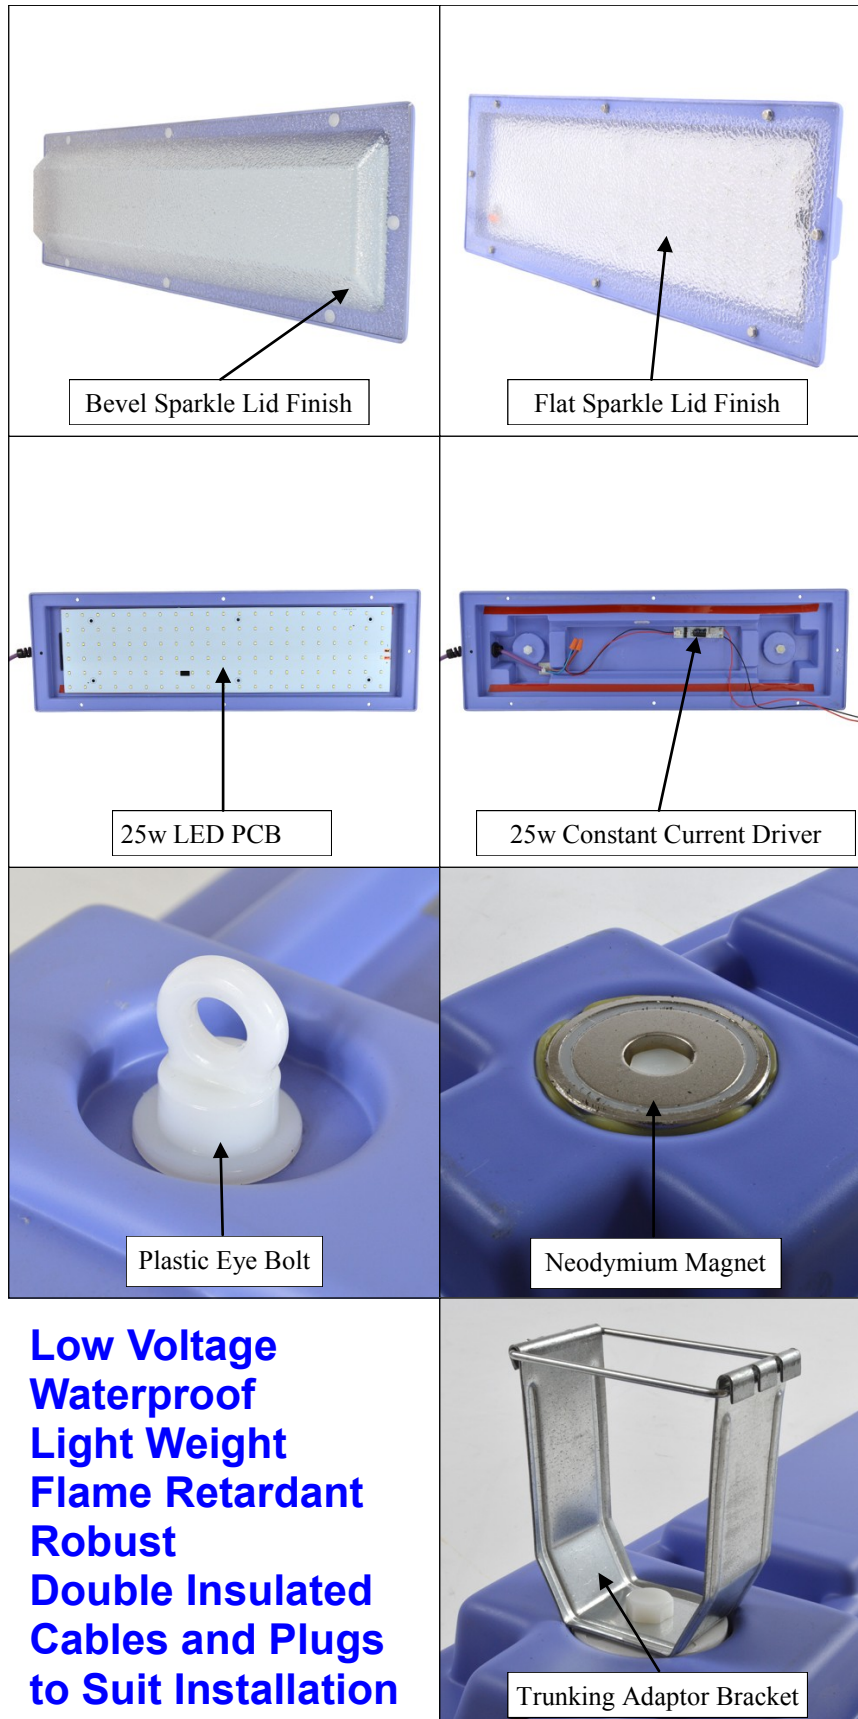

Technical Information with Bevel Sparkle Lid Finish

Materials	ABS & Polycarbonate	
Wattage	25w	
LED PCB	126 x 0.05w	
Constant Current Driver	1.04mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 75mm	
Input Voltage	110-240V AC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Diffuser	Bevel Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/B/PEB/25/110/240
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/B/NM/25/110/240
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/B/TAB/25/110/240

Technical Information with Flat Sparkle Lid Finish

Materials	ABS & Polycarbonate	
Wattage	25w	
LED PCB	126 x 0.05w	
Constant Current Driver	1.04mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 50mm	
Input Voltage	110-240V AC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Diffuser	Flat Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/F/PEB/25/110/240
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/F/NM/25/110/240
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/F/TAB/25/110/240

IVIC LTD

4 Winchester Drive
South West Industrial Estate
Peterlee
Co. Durham
SR8 2RJ
www.ivicltd.com

