




STARLIGHT HEAVY DUTY SERIES

'2ft' 8Watt 24Volt D.C. LED Emergency Light Unit

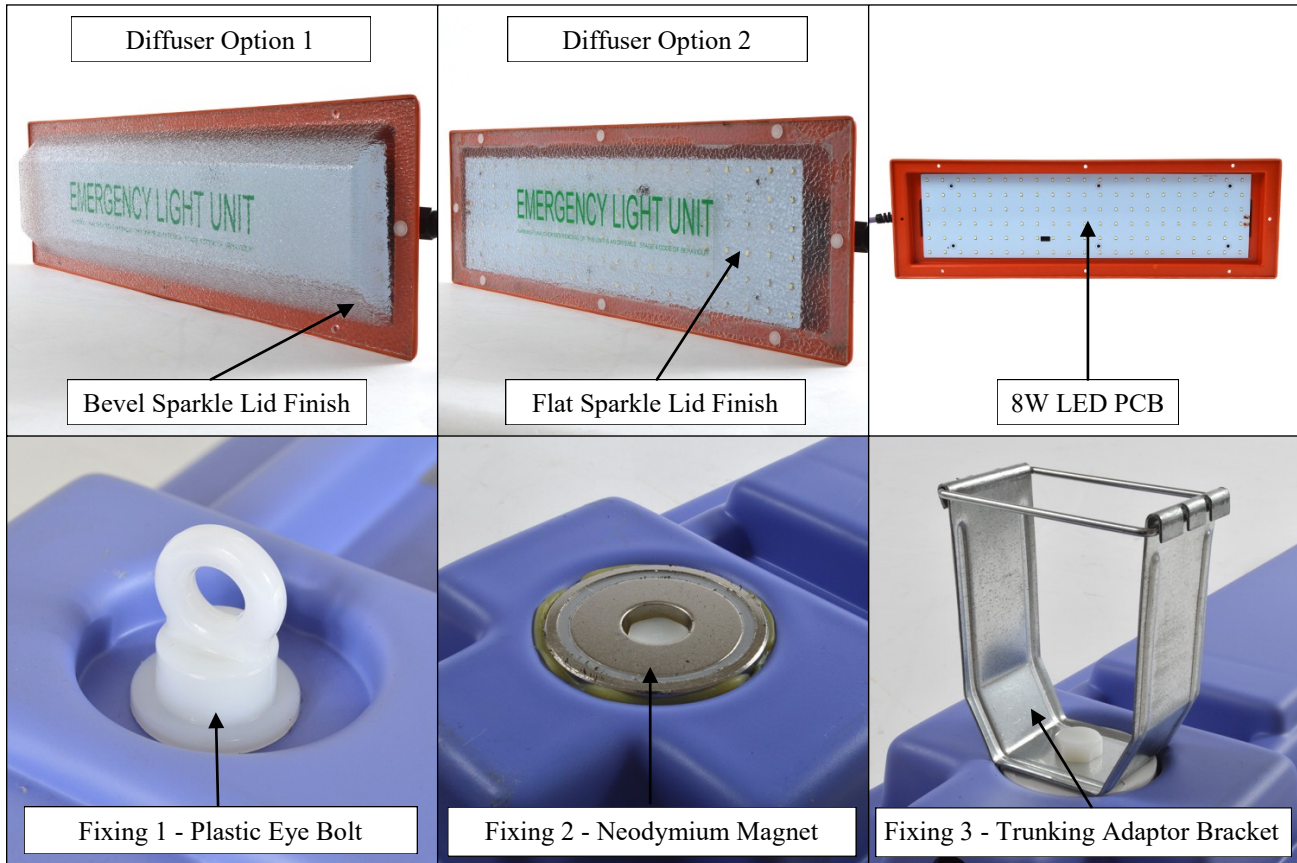

Applications

- Temporary Lighting for Shipping (Ship Repair, Ship Building)
- Food Manufacturing
- Abattoirs
- Breweries
- Paper Mills
- Railways
- Construction

Features

- Low Voltage
- Waterproof
- Light Weight
- Flame Retardant
- Robust
- Double Insulated
- Cables and Plugs to Suit Installation

Technical Information with Bevel Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w	
LED PCB	126 x 0.05w	
Constant Current Driver	33mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 75mm	
Input Voltage	24V DC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Bevel Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/B/EM/PEB/8/24V
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/B/EM/NM/8/24V
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/B/EM/TAB/8/24V

Technical Information with Flat Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w	
LED PCB	126 x 0.05w	
Constant Current Driver	33mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 50mm	
Input Voltage	24V DC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-20C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Flat Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/F/EM/PEB/8/24V
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/F/EM/NM/8/24V
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/F/EM/TAB/8/24V

IVIC LTD

4 Winchester Drive,
 South West Industrial Estate,
 Peterlee,
 Co. Durham, SR8 2RJ.
 United Kingdom
www.ivicltd.com

