

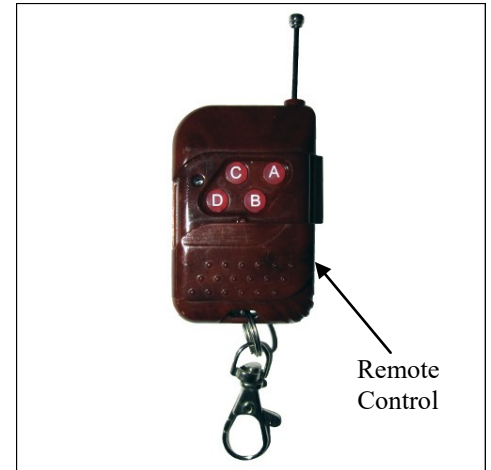


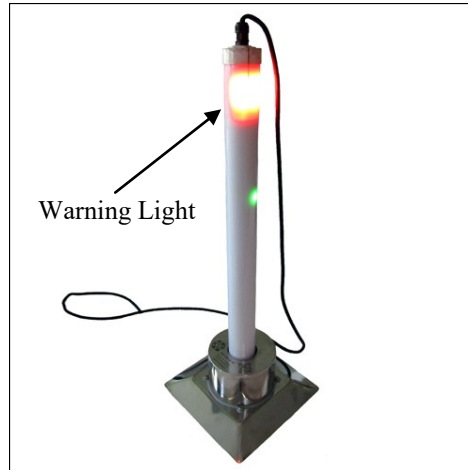

PROTOTYPE

Light Stand with Battery Standby

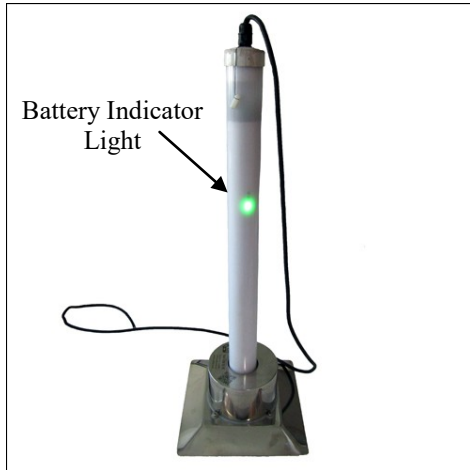

The LED Light Stand is a rugged, portable unit for use in arduous conditions where there no is mains power.

Features

- **Stainless Steel Fitting**
- **Double Insulation (Class II)**
- **Battery Protection (Over Charge Protection)**
- **Quick and Easy to Install.**
- **Waterproof Rating IP65.**
- **Light Weight**

Benefits

- **Save Energy**
- **Reduce Carbon Footprint**
- **Reduce Operating Cost**
- **Reduce Maintenance Cost**

Application

- **Ship Building & Ship Repair**
- **Construction**
- **Tunnelling**
- **Mining**
- **Railways**

Product Specification

Tube Type	T16 (50mm)
Materials	Stainless Steel, Polycarbonate & Nylon 6
Tube Wattage	11W
Power Factor	>0.95
LED Type	2835 0.2W Hongli Tronic
Voltage Range	100-240V A.C.
IP Rating	IP65
Battery Type	Li-Fe Batteries
Warning Light Wattage	0.8W
Emergency Battery Time	9 Hours
Maximum Charging Time	9 Hours
Colour Temperature Range	6500K
Colour	Daylight
LED CRI	81
Operating Temperature Range	-20C to +40C
Beam Angle	180 Degrees
Luminous Efficiency	100 LM/W
LED Life Expectancy	50,000 Hrs
Warranty	3 Years
Length	2ft (600mm)

Product Code

Light Stand with Battery Standby

Product Code: IV/LED/LS/BAT

IVIC LTD

4 Winchester Drive,
South West Industrial Estate,
Peterlee,
Co. Durham, SR8 2RJ.
United Kingdom
www.ivicltd.com

