


IVIC Limited

Ausllast Electronics Co.,Ltd



STARLIGHT HEAVY DUTY SERIES

' 2 f t ' 8 W a t t Emergency Light Unit C .

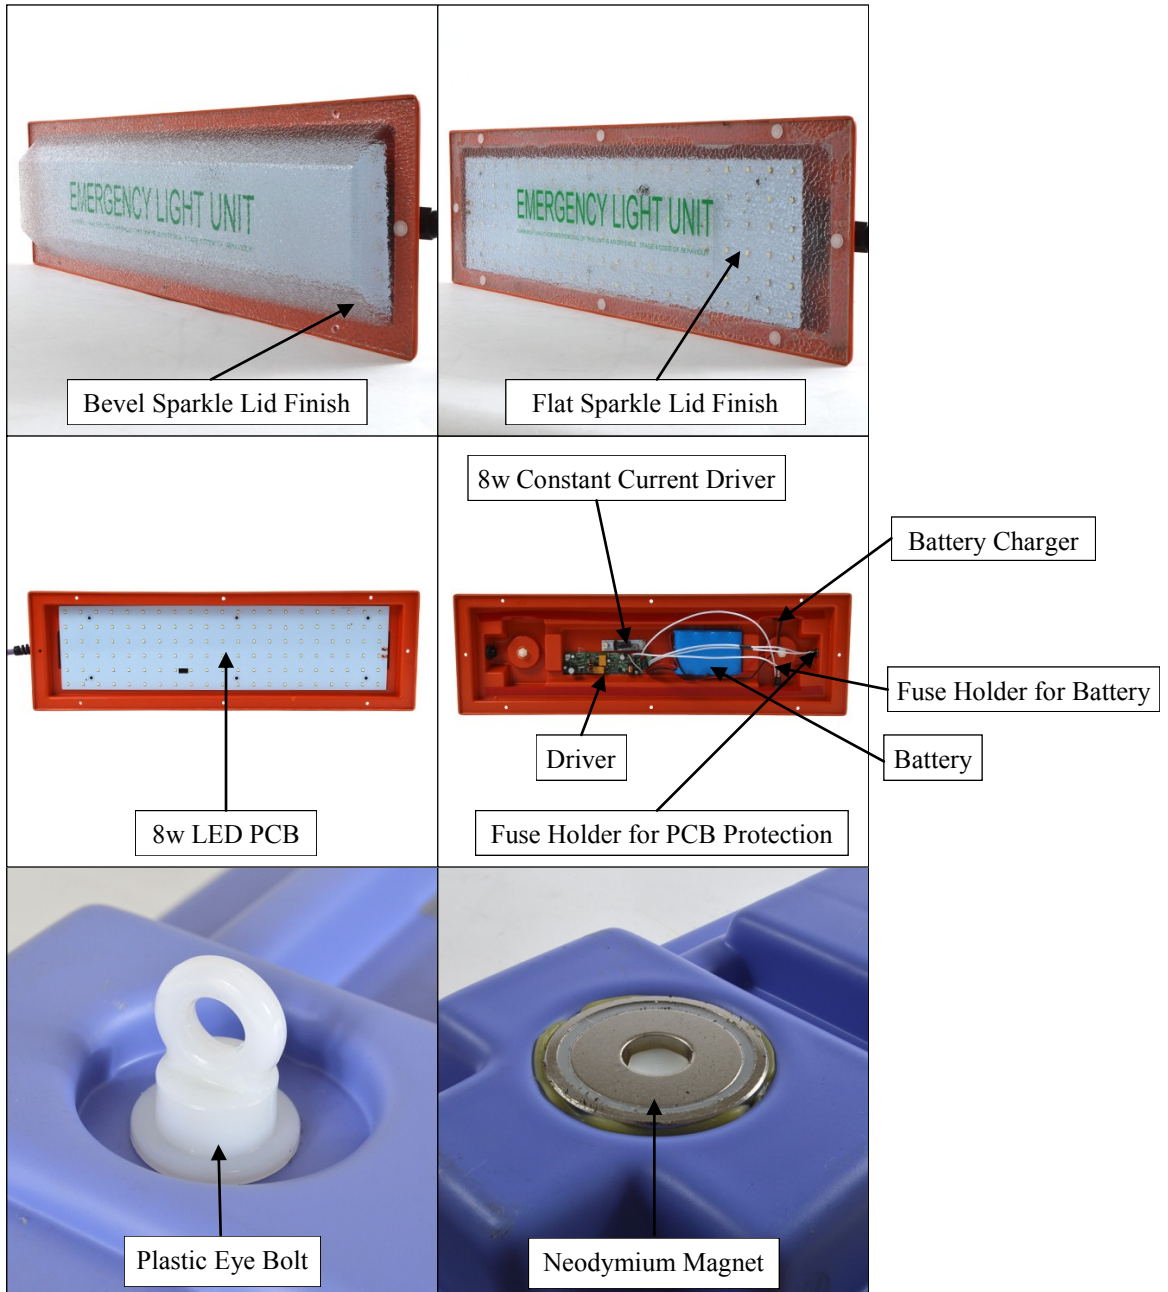

- **Low Voltage**
- **Waterproof**
- **Light Weight**
- **Flame Retardant**
- **Robust**
- **Double Insulated**
- **Cables and Plugs to Suit Installation**



Technical Information with Bevel Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w	
LED PCB	126 x 0.05w	
Constant Current Driver	40mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 75mm	
Input Voltage	24V DC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-10C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Bevel Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/B/EM/PEB/8/24
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/B/EM/NM/8/24
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/B/EM/TAB/8/24

Technical Information with Flat Sparkle Lid Finish		
Materials	ABS & Polycarbonate	
Wattage	8w	
LED PCB	126 x 0.05w	
Constant Current Driver	40mA	
Lumens Per Watt	115	
Weight	1kg	
Size	600mm x 190mm x 50mm	
Input Voltage	24V DC	
Colour Temperature Range	6000K	
Colour	Cool White	
IP Rating	65	
Operating Temperature Range	-10C to +55C	
LED Voltage	24Volts DC	
Insulation	Class 2	
Battery Life	60,000 Hrs	
Backup Duration	3 Hours	
Diffuser	Flat Sparkle Lid Finish	
Suspension Fixing with Plastic Eye Bolts	Product Code	IV/LED/2FT/F/EM/PEB/8/24
Suspension Fixing with Neodymium Magnets	Product Code	IV/LED/2FT/F/EM/NM/8/24
Suspension Fixing with Trunking Adaptor Bracket	Product Code	IV/LED/2FT/F/EM/TAB/8/24

IVIC LTD (United Kingdom)

Tel: +44-191-5184500
 Email: info@ivicltd.com
www.ivicltd.com



Ausllast Electronics Co.,Ltd (China)

Tel: +86-769-89993032
 Email: xpawang_63@yeah.net
www.ausllast.com

