



TeePlug Piercing Adaptor **For Figure of 8 Cable for Speedy Installation of Temporary Lighting**

This connector features innovation, safety and reliability. The installation time is reduced to a minimum and the security is guaranteed because of IP65 degree of protection, dust and water are no longer a problem.


Features and Benefits

- **Plug and socket connector with piercing clip (no tools required to wire).**
- **Components are keyway coded to ensure correct assembly.**
- **Threaded locking nut guarantees maximum safe locking between plug and socket.**
- **Protective closure cap with black silicon belt.**
- **Quick and simple to install to improve production and increase safety.**
- **Temperature range of -20C to +125C.**
- **Grey Colour available on request.**
- **Waterproof (IP65)**

Applications

- Ship Building & Ship Repair
- Construction
- Tunnelling
- Railways

Diagram

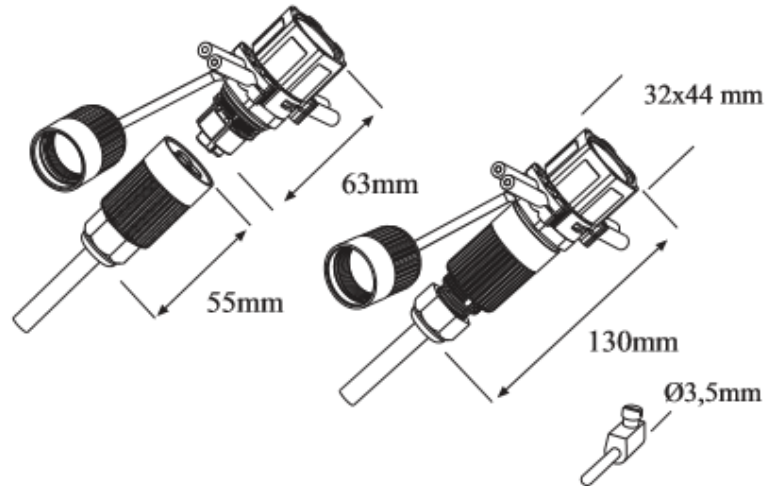

Specification

Cable Entries	1
Number of Poles	2
Terminal Type	Screw - piercing
Body Material	PA66
IP Rating	65
Max Conductor Size (Sq mm)	4
Max Current (A)	17.5
Max Voltage (V)	400
Minimum Temp Rating	-40C
Max Temp Rating	125C
Minimum Cable Diameter (mm)	7
Maximum Cable Diameter (mm)	12
Fixing System	Cable
Temperature "T" Rating	T85

Product Code

TeePlug Piercing Adaptor	Product Code:	IV/THB/370/A2A
--------------------------	---------------	----------------

IVIC LTD

4 Winchester Drive
South West Industrial Estate
Peterlee
Co. Durham
SR8 2RJ
www.ivicltd.com

