





Low Smoke Zero Halogen Flexible Cables

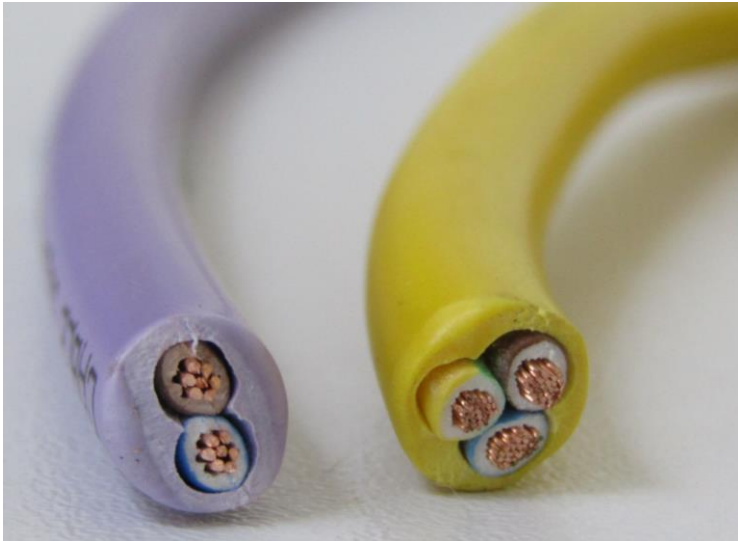

IVIC Ltd's LSZH cables are designed to withstand a fire situation, where circuit integrity is essential.

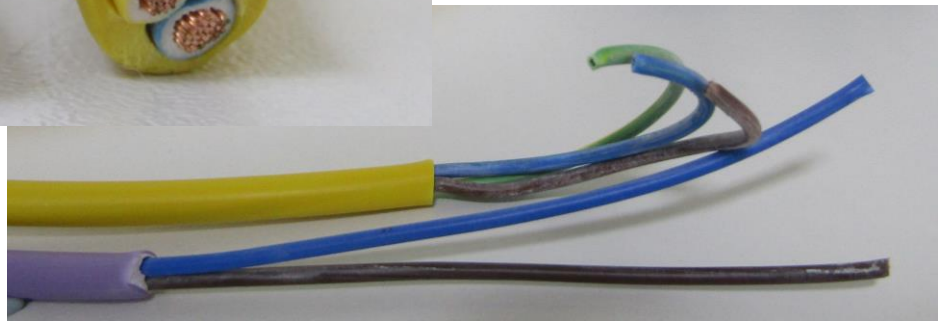

Applications

- **Public Buildings, e.g. schools, hotels, hospitals**
- **Festoon, Emergency & Temporary Lighting**
- **Heavy Industry, e.g. construction, ship building**

Specification

Length (metres)	Bespoke to clients requirements
Flexibility	318
Diameter (sq millimetres)	0.75, 1.0, 1.5 & 2.5
Sheath colour	Any of the 12 primary colours
Temperature range	-40 to +70°C
Conductor material	Copper
Cable print available	Yes
Number of cores	2, 3, 4, 5, 6 & 7
Approved by	BS EN 50575:2014+A1:2016
CPR Class	Dca, s2,d2,a1
Standard	BE EN 50525-3-11:2011